

CTX 300

Gas Detectors

- **Quick response times**
- **Pre-calibrated sensor modules**
- **One man calibration**
- **Local display (optional)**
- **Durable in harsh environments**

The detection of toxic gases or lack of oxygen requires the installation of detectors satisfying demanding requirements. The CTX 300 range is designed for all safety needs in unclassified areas.

The CTX 300 transmits the relevant data in record time, covering all hazard situations and providing extreme flexibility by way of a wide range of sensors.

Equipped with pre-calibrated sensors, display unit and adjustment devices, the CTX 300 transmitter can be maintained by one person.

Flexibility and reduced maintenance

Satisfying your safety requirements means making genuine technical breakthroughs as well as providing clear economic value.

Sensors integrating zero and sensitivity parameters are used so that maintenance is quick and safe.

The principle of the pre-calibrated sensor unit allows maintenance by a single person and significant reduction in costs.

Compliance with standards

- Compliance with European standards
- EMC in compliance with directives



Pre-calibrated sensor for easier maintenance

Gas	Type of sensor	Range (in ppm)	Operating temperature	Relative humidity uncondensed
O ₂	electrochemical	30,0%	-20°C to + 50°C	10% to 95% RH
		100%	5°C to 40°C	10% to 95% RH
CO	electrochemical	100	-20°C to + 50°C	10% to 95% RH
		300	-20°C to + 50°C	10% to 95% RH
		1000	-20°C to + 50°C	10% to 95% RH
		1,00%	-20°C to + 50°C	10% to 95% RH
		10,00%	-20°C to + 50°C	10% to 95% RH
CO ₂	infrared	1%	-30°C to +45°C	5% to 95% RH
		5%	-30°C to +45°C	5% to 95% RH
		10%	-30°C to +45°C	5% to 95% RH
		50%	-30°C to +45°C	5% to 95% RH
H ₂ S	electrochemical	30,0	-20°C to + 50°C	10% to 95% RH
		100	-20°C to + 50°C	10% to 95% RH
		1000	-20°C to + 50°C	10% to 95% RH
NO	electrochemical	100	-20°C to + 50°C	10% to 95% RH
		300	-20°C to + 50°C	10% to 95% RH
		1000	-20°C to + 50°C	10% to 95% RH
NO ₂	electrochemical	10,0	-20°C to + 50°C	10% to 95% RH
		30,0	-20°C to + 50°C	10% to 95% RH
SO ₂	electrochemical	10,0	-20°C to + 50°C	10% to 95% RH
		30,0	-20°C to + 50°C	10% to 95% RH
		100	-20°C to + 50°C	10% to 95% RH
Cl ₂	electrochemical	10,0	-20°C to + 50°C	10% to 95% RH
H ₂	electrochemical	2000	-20°C to + 50°C	10% to 95% RH
HCl	electrochemical	30,0	-20°C to + 50°C	10% to 95% RH
		100	-20°C to + 50°C	10% to 95% RH
HCN	electrochemical	10,0	-20°C to + 50°C	10% to 95% RH
		30,0	-20°C to + 50°C	10% to 95% RH
NH ₃	electrochemical	100	-20°C to + 50°C	10% to 95% RH
		1000	-20°C to + 50°C	10% to 95% RH
O ₃	electrochemical	1,00	-20°C to + 50°C	10% to 95% RH
PH ₃	electrochemical	1,00	-20°C to + 50°C	10% to 95% RH
ClO ₂	electrochemical	3,00	-20°C to + 50°C	10% to 95% RH
Toluene	semiconductor	2000	-20°C to +50°C	10% to 95% RH
		500	-20°C to +50°C	10% to 95% RH
Trichloroethylene	semiconductor	500	-20°C to +60°C	10% to 95% RH
Xylene	semiconductor	2000	-20°C to +50°C	10% to 95% RH
Ethanol	semiconductor	5000	-20°C to +60°C	10% to 95% RH
		500	-20°C to +50°C	10% to 95% RH
R12	semiconductor	10000	-20°C to +55°C'	10% to 95% RH
R22	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R123	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R134a	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R142b	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R11	semiconductor	10000	-20°C to +55°C'	10% to 95% RH
R23	semiconductor	10000	-20°C to +55°C'	10% to 95% RH
R141b	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R143a	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R404a	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R507	semiconductor	2000	-20°C to +55°C'	10% to 95% RH
R410a	semiconductor	1000	-20°C to +55°C'	10% to 95% RH
R32	semiconductor	1000	-20°C to +55°C'	10% to 95% RH

Other gases on request



SPECIFICATIONS

Pressure	Accuracy at PA full scale	Life span (in month)	T (50) seconds	IP
Atm +/- 10%	+/- 1,5%	28	10	66
Atm +/- 10%	+/- 1,5%	36	< 20	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	< 20	66
Atm +/- 10%	+/- 1,5%	36	< 20	66
Atm +/-10%	+/- 2%	60	70 (T90)	66
Atm +/-10%	+/- 2%	60	70 (T90)	66
Atm +/-10%	+/- 2%	60	70 (T90)	66
Atm +/-10%	+/- 2%	60	70 (T90)	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	24	20	66
Atm +/- 10%	+/- 1,5%	24	20	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	36	15	66
Atm +/- 10%	+/- 1,5%	24	50	66
Atm +/- 10%	+/- 1,5%	24	50	66
Atm +/- 10%	+/- 1,5%	24	50	66
Atm +/- 10%	+/- 1,5%	24	50	66
Atm +/- 10%	+/- 2%	24	30	66
Atm +/- 10%	+/- 2%	24	30	66
Atm +/- -10%	+/- 3%	24	50	66
Atm +/- -10%	+/- 3%	24	50	66
Atm +/- 10%	+/- 3%	18	40	66
Atm +/- 10%	+/- 3%	18	40	66
Atm +/-10%	+/- 2%	24	50	66
Atm +/-10%	+/-15% relative to alarm threshold	18	20	66
Atm +/-10%	+/-15% relative to alarm threshold	18	20	66
Atm +/-10%	+/-15% relative to alarm threshold	18	40	66
Atm +/-10%	+/-15% relative to alarm threshold	18	20	66
Atm +/-10%	+/-15% relative to alarm threshold	18	20	66
Atm +/-10%	+/-15% relative to alarm threshold	18	20	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	30	66
Atm +/-10%	+/-15% relative to alarm threshold	18	20	66
Atm +/-10%	+/-15% relative to alarm threshold	18	20	66

Better performance, enhanced ergonomics

Better performance

- Excellent sensitivity and signal stability
- 2 mA signal for maintenance mode
- Signal lower than 1 mA for failure mode

Clear readability

- Highly sensitive, lighted display allows local reading
- Effective power-up indication by indicator lights
- Indication of maintenance or fault function

High-Level technology

- Pre-calibrated sensor avoiding the need to use unstable gases on site for calibration purposes
- Remote sensor unit allowing measurements in even the most inaccessible places
- High-performance semiconductor type detector (detection of freon gas, etc.)

Advanced design

- Highly resistant to environmental elements
- Avoids having to use protective covers

Heavy-duty

- Use of polycarbonate and stainless steel mounting hardware
- Resistant to corrosive agents
- Durable housing

Specifically adapted options

- Removable filters, interchangeable without opening the housing (which is dust-proof, condensation-proof and water-resistant)
- Splash guard
- Gas collector cone
- Mounting brackets
- Pitot tubes, floats, heating protective device, etc.



Backlit display



Gas collector



Calibration cup



Mounting bracket



Bypass adapter



REV 0608



A wide range of sensors*

Enclosure:	Polycarbonate housing
Function:	Detector-transmitter
Display:	Highly visible backlight display unit (on option)
Indicator lights:	In operation: green color
(on CTX 300 : 3-wire)	Failure / maintenance : yellow color
Link:	2 wires – CTX 300 without display unit
	3 wires – CTX 300 with display unit
Cable inlet:	Between 6 and 11, gland PG9
Power supply:	15 to 32 V DC
Power consumption:	CTX 300 without display unit : 27 mA
	CTX 300 with display unit : 110 mA
	CTX 300 with display unit, for CO ₂ sensor version, or for solid states sensor versions : 100mA
Operating temperature:	-20°C to + 50°C
Sealing:	IP 66
Weight:	520 g
Dimensions:	130 x 136 x 69 (lxhxd) in mm
Certification:	Safe area only
EMC:	Compliance with directives
	Subject to operation conditions
Impedance :	32 ohms max loop for CTX300 with display unit and for solid states and CO2 sensor versions

128 ohms max loop for CTX300 without display unit

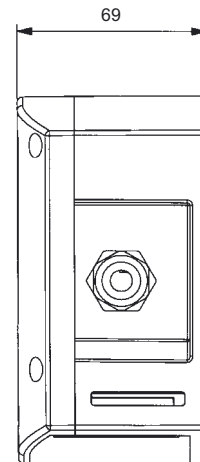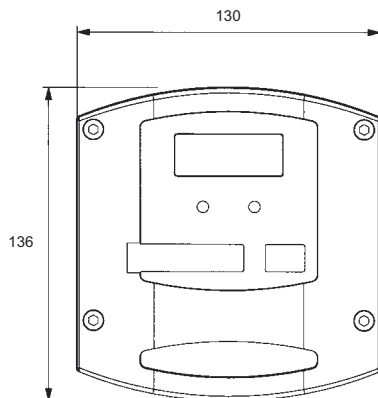

INDUSTRIAL SCIENTIFIC CORPORATION

CORPORATE HEADQUARTERS

1001 Oakdale Road • Oakdale, PA • 15071-1500 • USA

www.indsci.com



AMERICAS

Tel.: +1-412-788-4353

Fax: +1-412-788-8353

info@indsci.com

ASIA PACIFIC

Tel.: +86-10-8497-3970

Fax: +86-10-8497-3971

info@ap.indsci.com

EUROPE

Tel.: +33-3-21-60-80-80

Fax: +33-3-21-60-80-00

info@eu.indsci.com

AUSTRALIA / NZ

Tel.: +61-2-8870-3400

GERMANY

Tel.: +49-231 / 9241-0

NETHERLANDS

Tel.: +31-76-5427-609

SWITZERLAND

Tel.: +41-26-652-51-18

CZECH REPUBLIC

Tel.: +420-234-622-222

MIDDLE EAST

Tel.: +971-50-455-8518

SINGAPORE

Tel.: +65-6561-7377

UNITED KINGDOM

Tel.: +44-1280-706114