

Prevention of the risks

Measurement and alarm unit

MX 32


■ ■ ■ 1 or 2 independent channels

■ ■ ■ Easy installation

■ ■ ■ Flexible programming

■ ■ ■ Wall mounted

■ ■ ■ Compliant with European Standards

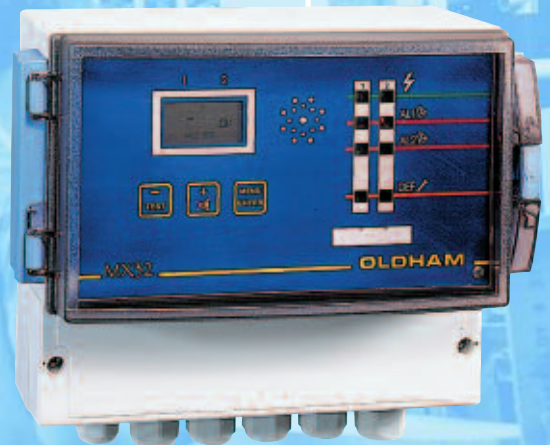

ATEX

INDUSTRIAL SCIENTIFIC

OLDHAM

Global fire and gas detection solutions



Example : print industry

■ ■ ■ Together we'll make your operations safe

Oldham has designed the MX 32, a measurement and alarm unit that is perfectly suitable for the protection of your equipment and personnel in atmospheres which may contain flammable and toxic gases. Available with one or two separate channels, the MX 32 offers you tailor-made detection capabilities and exceptional programming possibilities with its range of Oldham detectors.

Its purchase and operating costs are enhanced by its easy installation and great operating flexibility.

■ ■ ■ 2 in 1 performance

The MX 32 measurement and alarm unit for the detection of combustible or toxic gases is, in fact, a "dual single-channel" system. It is available with one measuring channel and an extension. This operating flexibility ensures the protection of your personnel and your plant.

Increased safety

The MX 32 is equipped with two independent, instantaneous alarm thresholds.

Remarkable reliability

SMC and microcontroller technologies guarantee the quality of measurement processing, the user interface and the triggering of alarms. Protection against electromagnetic interference is built in.

Compliance with standards

The MX 32 complies with European standards 50054, 50081, 50082 and with low-voltage directives.




Enhanced ergonomics

User-friendly front panel

- "Power on" indicator lights
- Buzzer
- Manual or automatic acknowledgement
- 3 control keys

Variety of connections

- Wheatstone bridge detectors
- 4-20 mA detectors (2 or 3 wires)
- Fire detectors
- Flame detectors

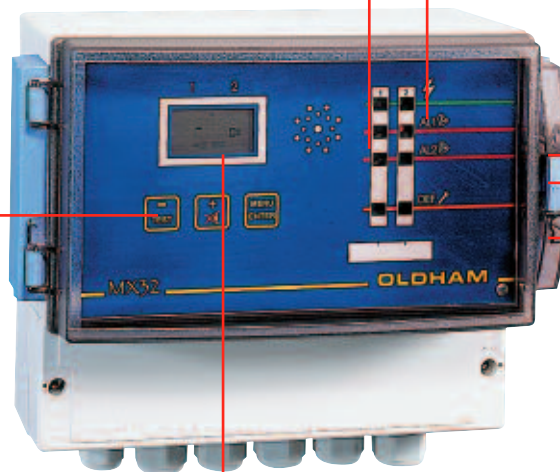

Easy installation


- Small-sized wall-mounted box, that is easy to install
- Protected front face
- Sealed polycarbonate box (IP 66)

Simple operation

- Liquid crystal display panel
- Simple programming by keypad
- Power supply 230 V AC or 115 V AC (24 V DC back-up)

High safety

- Visual alarms
- Red LED for two gas alarm thresholds per channel
- Yellow LED for fault alarm per channel

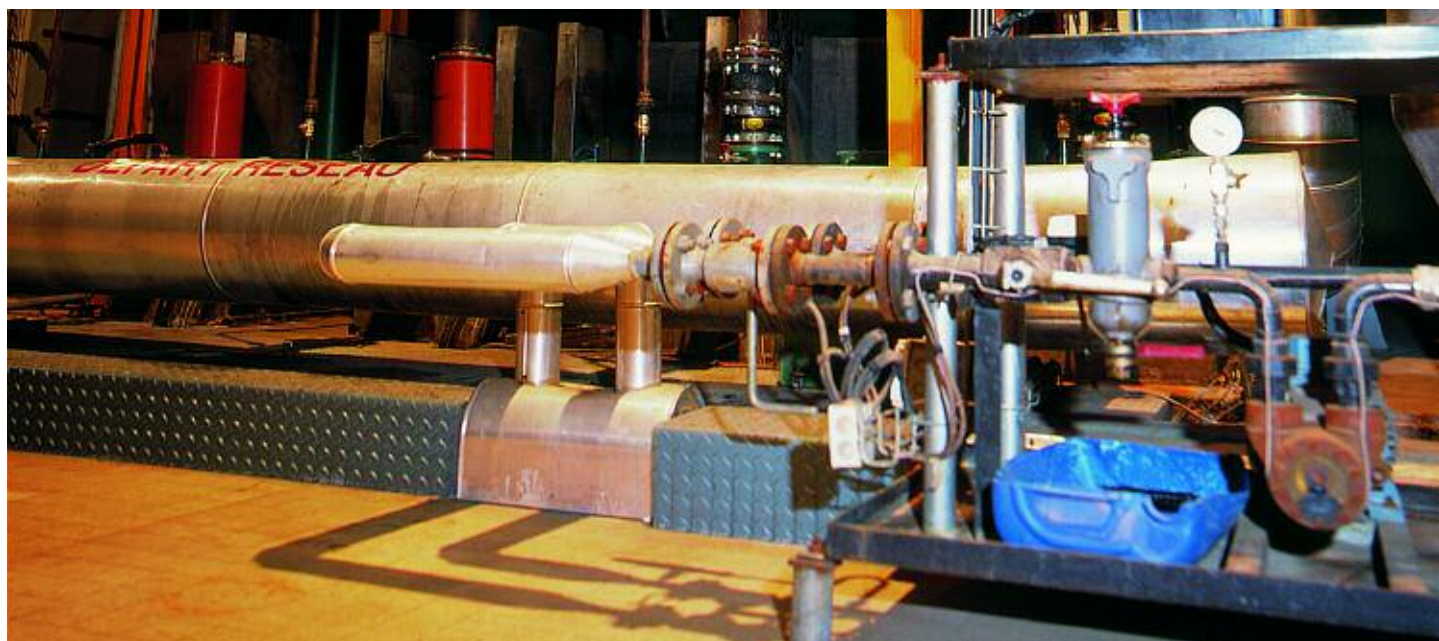

Example of application : boiler plant

Technical characteristics

Manufacturer :	• OLDHAM SA
Function :	• Gas monitor
Presentation :	• Wall-mounted box, Noryl type
Capacities :	• 1 or 2 channels
Measurement :	• Continuous
Display :	• Liquid crystal, fixed or scrolling
Alarms :	• 2 independent alarm thresholds per channel • Individual programming, by increasing or decreasing • Manual or automatic acknowledgement
Visual alarms :	• 2 red LED + gas alarms per channel • 1 yellow LED fault per channel
Audio alarm :	• Buzzer
Relays :	• 2 gas alarm relays per channel • One common relay for faults • Type of contact : NO or NC, programmable by jumpers
Power supply :	• 115 V or 230 V AC • 24 V DC
Power consumption :	• 30 W
Relay max. resistive	
Breaking capacity :	• 2 A / 230 V AC / 30 V DC
Weather protection :	• IP 66

Detector connections per channel


Bridge type :	• 1 detector : maximum distance 300 m (3 x 1,5 mm ²) • 2 detectors : utilization of a junction box (Please consult us)
---------------	---

Detector with transmitter :	• One to five 2-wire detectors, 4-20 mA • One 3-wire detector, 4-20 mA • Cable 3 x 1.5 mm ² (32 Ω max. in loop mode)
Fire detectors :	• One to five detectors : cable 2 x 0.65 mm ²
Flame detectors :	• One 3-wire detector • Cable 3 x 1.5 mm ² (4,8 Ω max. in loop mode)

Miscellaneous

Weight :	• 1,750 g
Acknowledgement :	• Manual or automatic
Operating temperature :	• -20°C to +55°C
Relative humidity :	• 5% to 95% RH

Complies with EMC and low-voltage directives

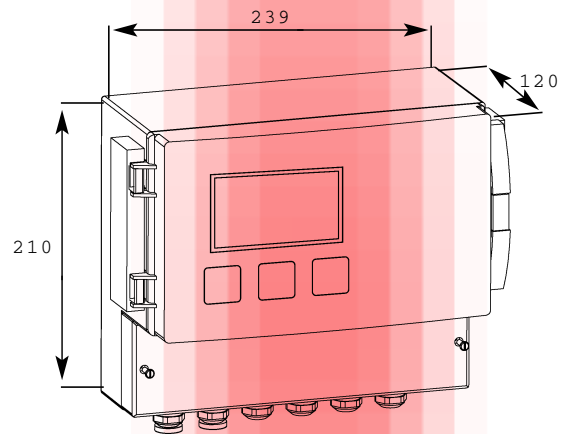

MX 32



Your agent or retailer

INDUSTRIAL SCIENTIFIC

OLDHAM

Plant and head office : Z.I. Est - rue Orfila - B.P. 417 - 62 027 ARRAS Cedex FRANCE
Tel. : 33 3 21 60 80 80 Fax : 33 3 21 60 80 00
Web site : <http://www.oldhamgas.com>

EXPORT DEPARTMENT :
PHONE : 33 3 21 60 80 80 - FAX : 33 3 21 60 80 05

AMERICAS

Tel.: +1 412 788 4353
Fax: +1 412 788 8353
info@indsci.com

ASIA PACIFIC

Tel.: 86 10 8497 3970
Fax: 86 10 8497 3971
sales@isc-cn.com

EUROPE

Tel.: 33 3 21 60 80 80
Fax: 33 3 21 60 80 00
info@groupoldham.com

AUSTRALIA / NZ

Tel.: +61 2 8870 3400

CZECH REPUBLIC

Tel.: +420 234 622 222/3

GERMANY

Tel.: +49 231 / 9241 0

ITALY

Tel.: +39 011 3801371

MIDDLE EAST

Tel.: +971 50 455 8518

NETHERLANDS

Tel.: +31 76 5427 609

SINGAPORE

Tel.: +65 6561 7377

SWITZERLAND

Tel.: +41 26 652 51 18

UNITED KINGDOM

Tel.: +44 0 1782 562002